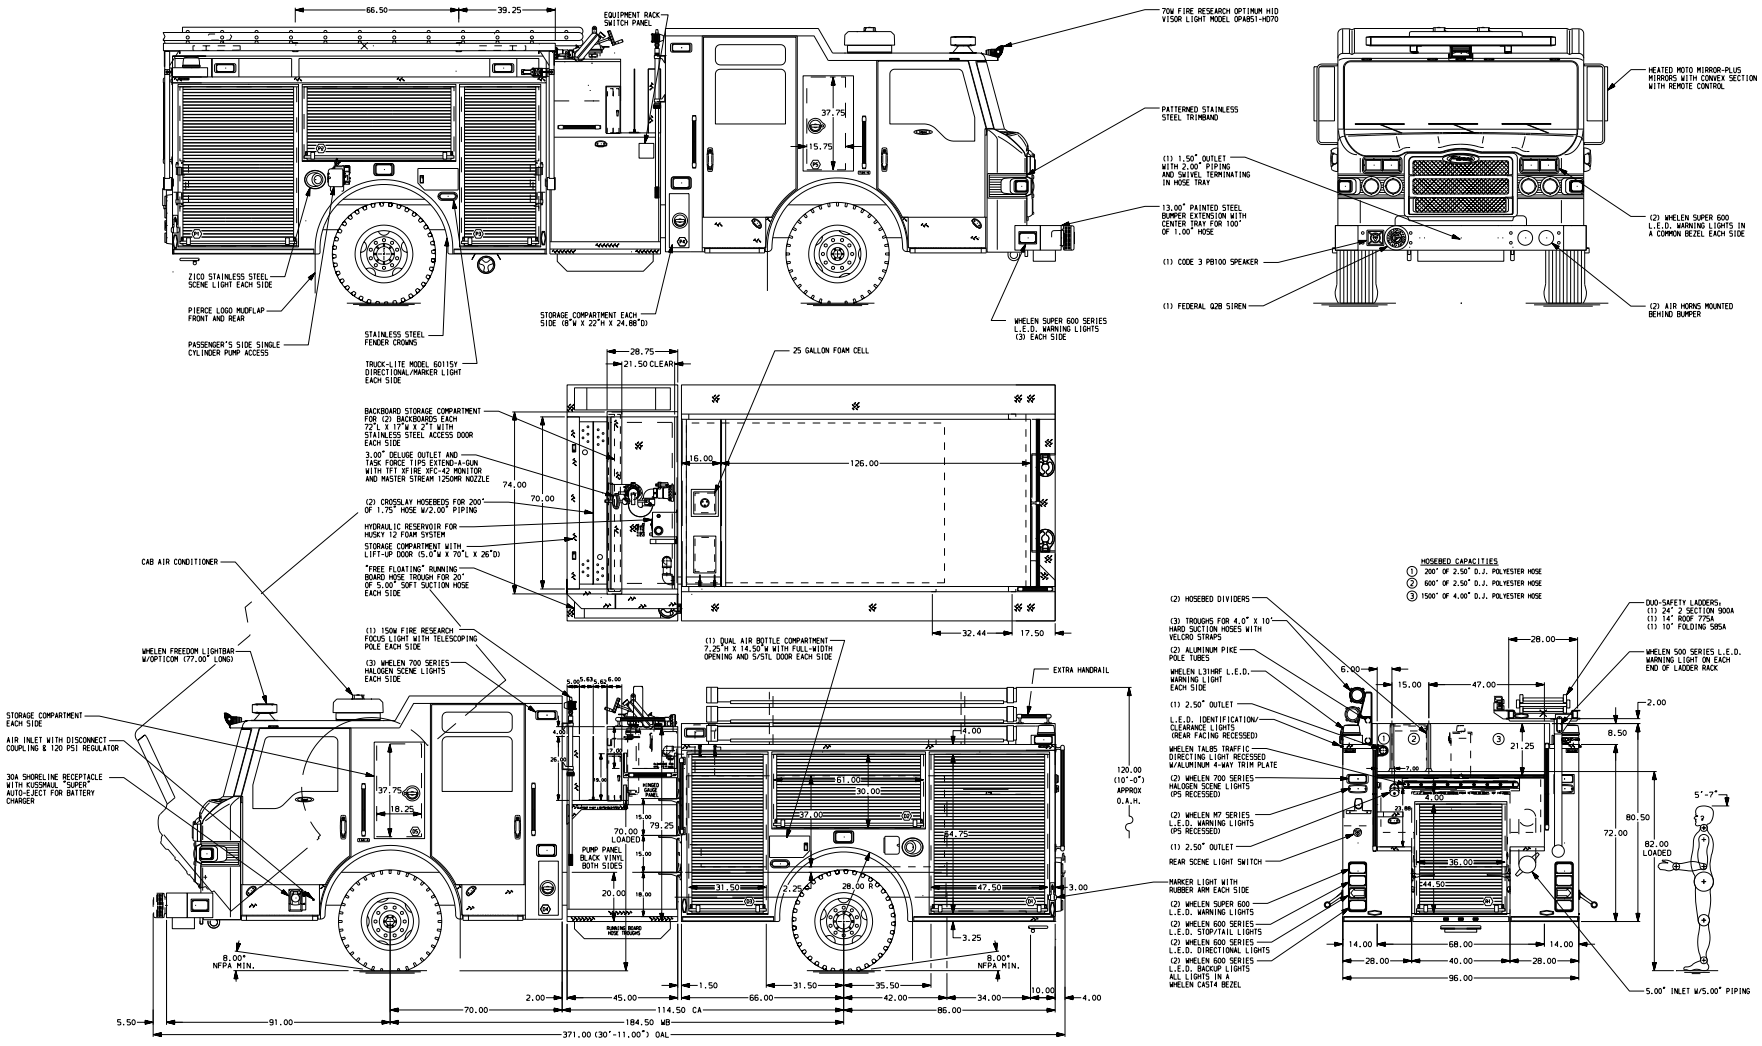

ALUMINUM BODY

MAXIMUM O.A.L. 374.25"

MAXIMUM O.A.H. 120.00"

CUSTOMER APPROVAL

APPROVED BY: _____

DATE: _____

Pierce MANUFACTURING INC.

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

1. S/STL SCUFFPLATE ON EACH CAB DOOR JAMB
2. BATTERY CHARGER LOCATED IN CREW CAB SEAT RISER
3. S/STL PROTECTIVE GUARD FOR ROLL-UP DOOR LOCATED ON ALL REAR BODY COMPARTMENTS
4. ONE FLOOR MOUNTED SLIDE-OUT TRAY IN COMPARTMENTS D1 & R1
5. ONE ADJUSTABLE SLIDE-OUT TRAY IN COMPARTMENT D3
6. TURTLE TILE MATTING ON FLOOR IN COMPARTMENTS D2, D3, P1, P2 & P3
7. TURTLE TILE MATTING ON ALL SHELVES AND TRAYS
8. ONE PIVOTING ALUMINUM TOOL BOARD IN COMPARTMENT P2
9. ONE ADJUSTABLE SHELF IN COMPARTMENTS D2, P2, P3 & R1, TWO EACH IN D1 & P1
10. RECESSED FILTER LOCATED ON ALL EXTERIOR COMPARTMENT VENTS
11. TWO DUPLEX RECEPTACLES LOCATED ON THE DS EMS COMPARTMENT
12. MOUNTING BASES FOR ANTENNA LOCATED PER SHOP ORDER

REV	DATE	BY	CH
V	28JUL09	BZI	KBO
V	30MAR09	BZI	KBO

CHASSIS DATA: MAKE PIERCE; MODEL IMPEL

TITLE: 1500-D-750 GAL POLY W/25 GAL FOAM CELL, 152" BODY HYDRAULIC LADDER RACK, DELUGE OUTLET, (2) CROSSLAYS

FOR: CLACKAMAS COUNTY FIRE DISTRICT #1 MILWAUKIE, OREGON

DWG NO. 21914AD

JOB NO.	21914 01,02
SCALE	1:24
DATE	
DRAWN BY	BZI 29JAN09
CHECKED BY	KBO 10FEB09
SHEET SIZE	D
SHEET NO.	1 OF 1

View File Created 29-JUL-2009 07:51:36